

VISSER transport belt TP

VISSER
HANDLING EQUIPMENT



The VISSER TP transporter is a versatile machine. Whether it's removing your soil during storage, filling the planting machine, or loading your products onto a truck, the VISSER TP transports it effortlessly. With a belt width of 65 or 80 cm and lengths from 5 to 11 meters, there's a suitable model for virtually any situation.

The robust chassis, large wheels, strong detachable tow bar, standard caster wheels at the intake side, easy adjustment, and simple operation ensure years of reliable operation and low maintenance costs.

The 32 mm high profile belt takes the product easy and with high capacity.

The VISSER TP gets the job done!




VISSER HANDLING EQUIPMENT

Technical specifications VISSER transport belt TP

Capacity:	Ca. 75-100 t/hr.
Standard:	Rubber belt with 32 mm high Chevron profile Round rubber intake hopper Drum motor with anti-slip lagging, top drive. Brake/backstop in drum motor (including electrical protection) Heavy duty steel construction frame Big pneumatic tires as main wheels Drawbar with double lip, detachable Control box with thermal protection and buttons with protective bracket Main phase selection switch
Optional:	Spindle adjustment swivel wheels intake side (Ø 200 mm) Tandem set at intake side 4 swivel wheels, spindle adjustment Swivel wheels Ø 250 mm instead of Ø 200 mm Transverse adjustment of main wheels Electric/hydraulic height adjustment with hydraulic unit Hydr. Intake-height-adjustment with cylinders SLC 2-wire line control 6P plug, with extra cable VLC 4-wire line control CA3 plug, with extra cable Various motors and/or frequency inverter

Type	Length	Width	Min. Height	Max. height	Angled top	Motor	Backlock motor
TP 5-650	5 m.	650 mm.	1.060 mm.	2.720 mm.	no	1,5 kW	yes
TP 6-650	6 m.	650 mm.	810 mm.	3.270 mm.	yes	1,5 kW	yes
TP 7-650	7 m.	650 mm.	1.320 mm.	3.730 mm.	no	1,5 kW	yes
TP 8-650	8 m.	650 mm.	1.060 mm.	4.270 mm.	yes	2,2 kW	yes
TP 9-650	9 m.	650 mm.	1.610 mm.	4.690 mm.	no	2,2 kW	yes
TP 10-650	10 m.	650 mm.	1.360 mm.	5.210 mm.	yes	2,2 kW	yes

Type	Length	Width	Min. Height	Max. height	Angled top	Motor	Backlock motor
TP 5-800	5 m.	800 mm.	1.060 mm.	2.720 mm.	no	2,2 kW	yes
TP 6-800	6 m.	800 mm.	810 mm.	3.270 mm.	yes	2,2 kW	yes
TP 7-800	7 m.	800 mm.	1.320 mm.	3.730 mm.	no	2,2 kW	yes
TP 8-800	8 m.	800 mm.	1.060 mm.	4.270 mm.	yes	3,0 kW	yes
TP 9-800	9 m.	800 mm.	1.610 mm.	4.690 mm.	no	3,0 kW	yes
TP 10-800	10 m.	800 mm.	1.360 mm.	5.210 mm.	yes	3,0 kW	yes
TP 11-800	11 m.	800 mm.	1.660 mm.	5.600 mm.	yes	3,0 kW	yes

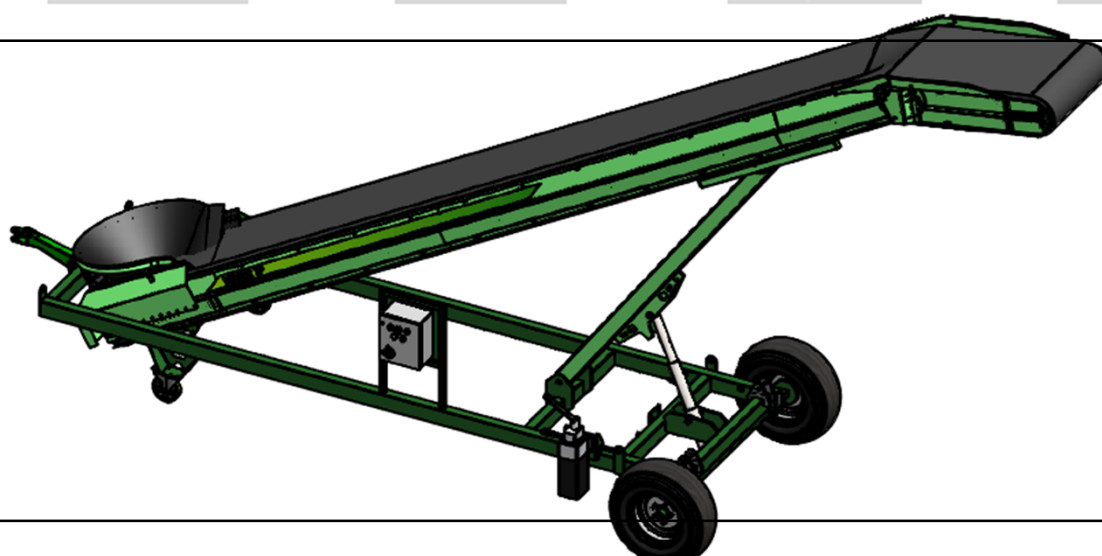



VISSER
HANDLING EQUIPMENT

De Marne 1
8701 PV Bolsward

Tel: +31 (0)85 732 54 00
@: info@visserbolsward.com

www.visserbolsward.com